


## Colne & Holme Valleys Strategic Planning Area



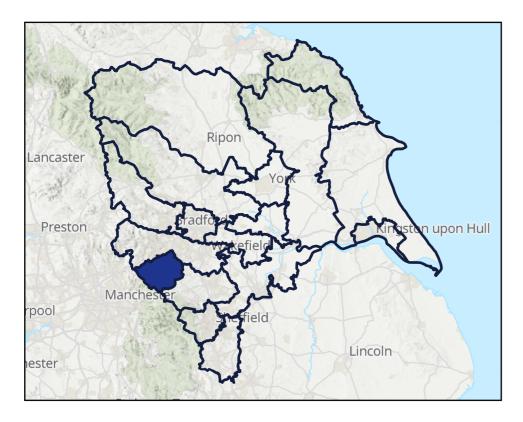

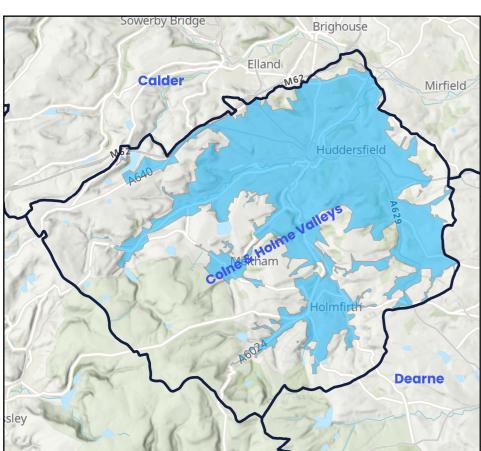

Key Strategic Planning Area Statistics		
Number of WwTW Catchments	8	
Population Equivalent in 2020	261,361	
Population Equivalent in 2050	305,346	
Population Equivalent Growth	17%	
Modelled Consented Storm Overflows	120	
Wastewater Pumping Stations	36	
Foul and Combined Sewer Length	1,244km	
Surface Water Sewer Length	243km	
Catchments Passed Through To BRAVA	4	

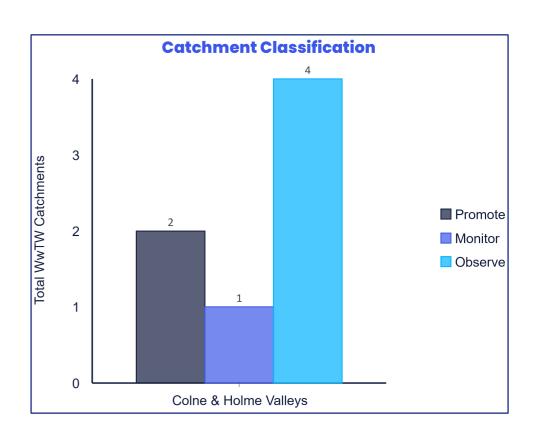

National Baseline Risk and Vulnerability Assessment								
Internal Sewer Flooding 2020 Score	Pollution Risk 2020 Score	Sewer Collapse Risk 2020 Score	Risk of Sewer Flooding (1 in 50) 2020 Score	Risk of Sewer Flooding (1 in 50) 2050 Score	Storm Overflow Performance 2020 Score	Storm Overflow Performance 2050 Score	Risk of WwTW Compliance Failure 2020	Risk of WwTW Compliance Failure 2050
2	2	0	2	2	2	2	0	0



<b>BRAVA Outcome S</b>	ummary
------------------------	--------

DRAVA Guttoomic Gummary		
Promote	Develop strategic catchment based solution options to address predicted risks and look for potential opportunities for partnership working	
Investigate	Work to understand in more detail the size and scale of the predicted catchment risk	
Monitor	Continue to monitor all potential risks in the catchment and promote once a suitable threshold is breached	
Observe	Did not trigger the required number of indicators in the RBCS process so therefore was not assessed against any criteria but will be reviewed in future DWMP cycles	

Copyright Yorkshire Water Services Ltd 2022 Contains OS data © Crown Copyright and database right 2020 Contains data from OS Zoomstack

## 25-Year Strategic Plan – How much do we need to invest?



Annual average of no more than 10 spills per storm overflow and reduced levels of property flood risk from hydraulic sewer flooding and ensure our WwTWs have sufficient capacity to allow us to remain compliant with our current environmental permits.

Scenario 3

Annual average of no more than 10 spills per storm overflow and maintain regional level of property flood risk from hydraulic sewer flooding and ensure our WwTWs have sufficient capacity to allow us to remain compliant with our current environmental permits.



Annual average of no more than 10 spills per storm overflow, plus no environmental harm from storm overflows and reduced levels of property flood risk from hydraulic sewer flooding and ensure our WwTWs have sufficient capacity to allow us to remain compliant with our current environmental permits.

Scenario 4

Annual average of no more than 10 spills per storm overflow, plus no environmental harm from storm overflows and maintain regional level of property flood risk from hydraulic sewer flooding and ensure our WwTWs have sufficient capacity to allow us to remain compliant with our current environmental permits.

Level 2 Coine & Holme Valley 25-Year Lowest Cost Plan Range		Level 2 Coine & Hoime Valley 25-Year Best Value Plan Cost Range			
cenario 1	£0.8 billion	£2.5 billion	Scenario 1	£1.0 billion	£3.0 billion
Scenario 2	£0.9 billion	£2.8 billion	Scenario 2	£1.1 billion	£3.2 billion
Scenario 3	£0.5 billion	£1.5 billion	Scenario 3	£0.8 billion	£2.5 billion
Scenario 4	£0.7 billion	£2.0 billion	Scenario 4	£0.9 billion	£2.7 billion

The risk position and subsequent outcome is a result based on the DWMP framework. The baseline and future performance of our catchments will be incorporated into our standard business planning processes and may result in some catchments changing classification and will be prioritised accordingly.